
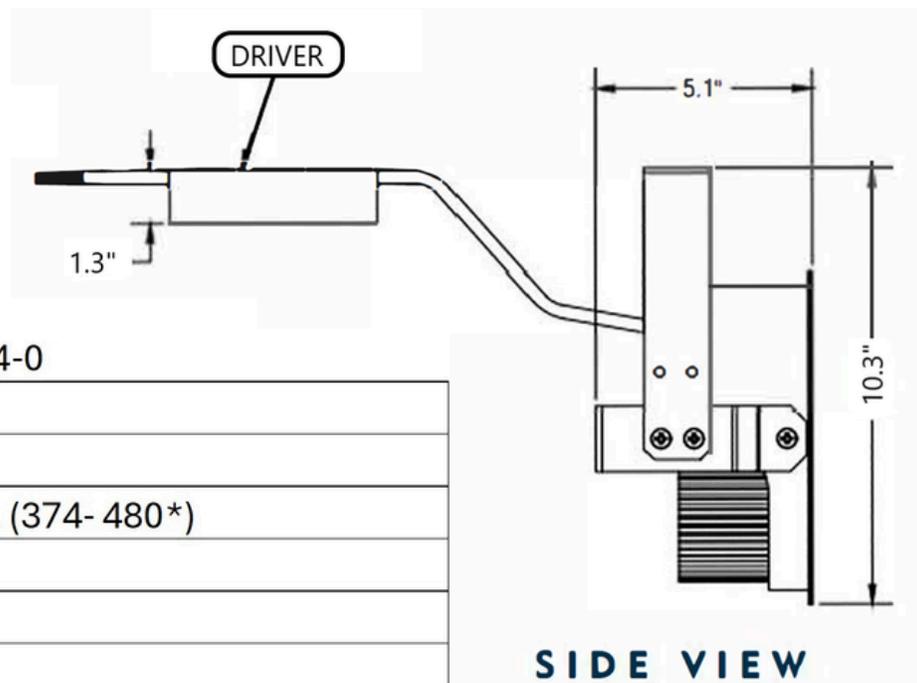




AirComfort70 SPECIFICATIONS

EIRX SYSTEMS

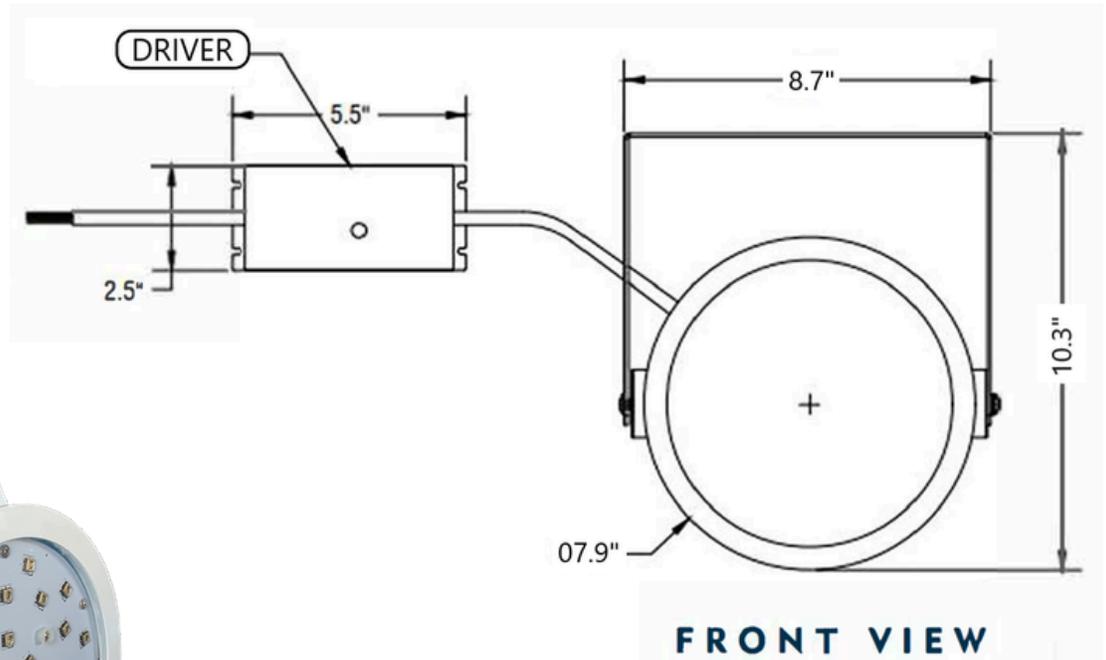

SKU	890-8084-0
WAVE LENGTH	280 nm
LED UV Power	70 watts
Input Voltage	120-277, (374- 480*)
Power Factor	0.9
Total Harmonic Distortion	<10%
Frequency	50/60
Light Beam Angle	130°
Operating Temp.Range	-40°F to 140° F (-40°C to 60°C)
Application	Indoor air disinfection & sterilization
Electrical Cert.	ETL
Connection Type	Pig Tails
Surge Protection	6KV/4KV
IP Rating	IP 65
Compliance	FDA

Layout Examples - Duct Size and Number of AirComfort70's Required

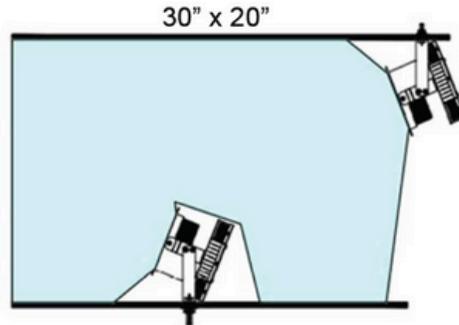

**Helps Reduce Viruses,
Fungal Spores, Mold,
and other Pathogens to
provide people with
safer, cleaner, and
fresher air.**

FDA
COMPLIANT



ETL
c LISTED us
Intertek

Proudly Designed,
Engineered &
Manufactured In the
US & Canada

